

Fig. 1

FIG. 1 OF 20

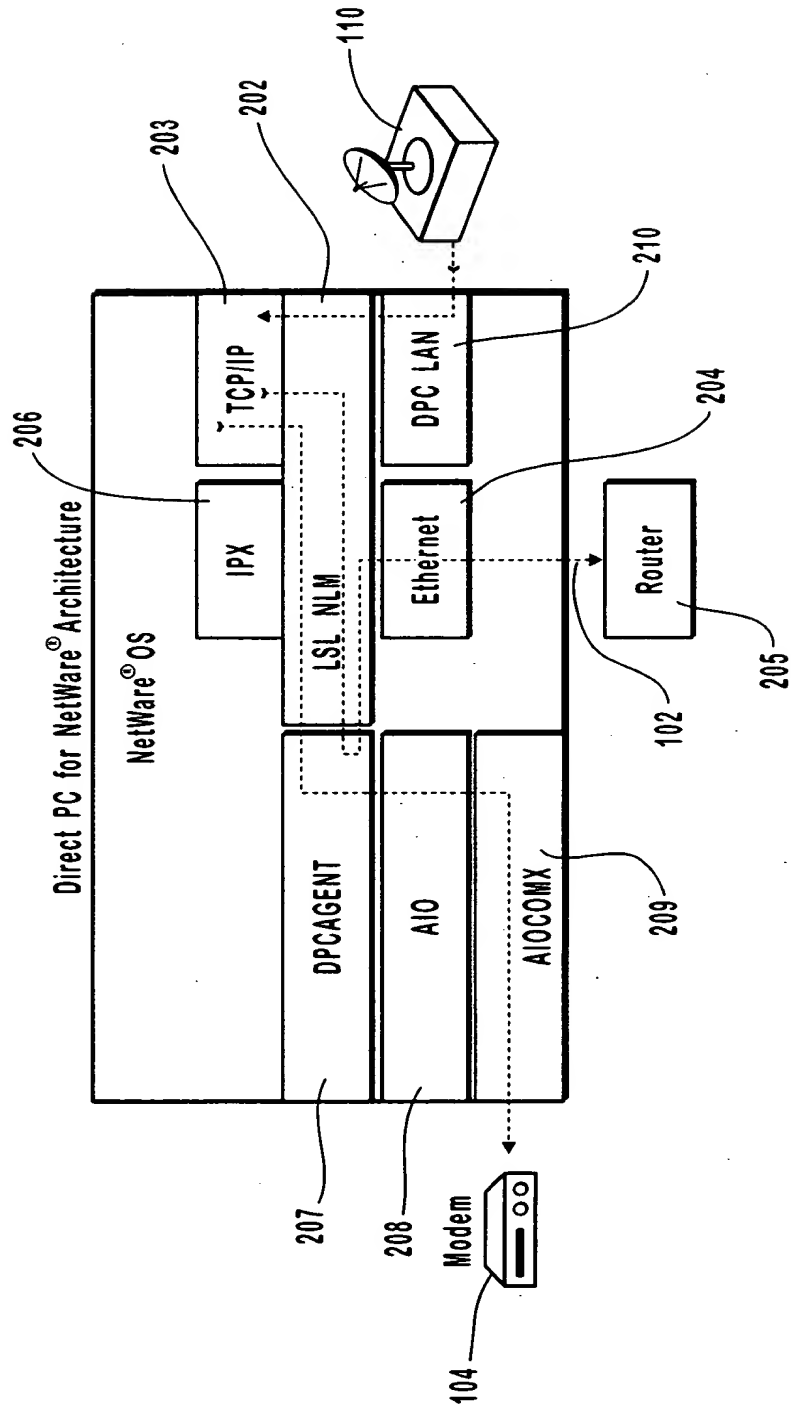


Fig. 2

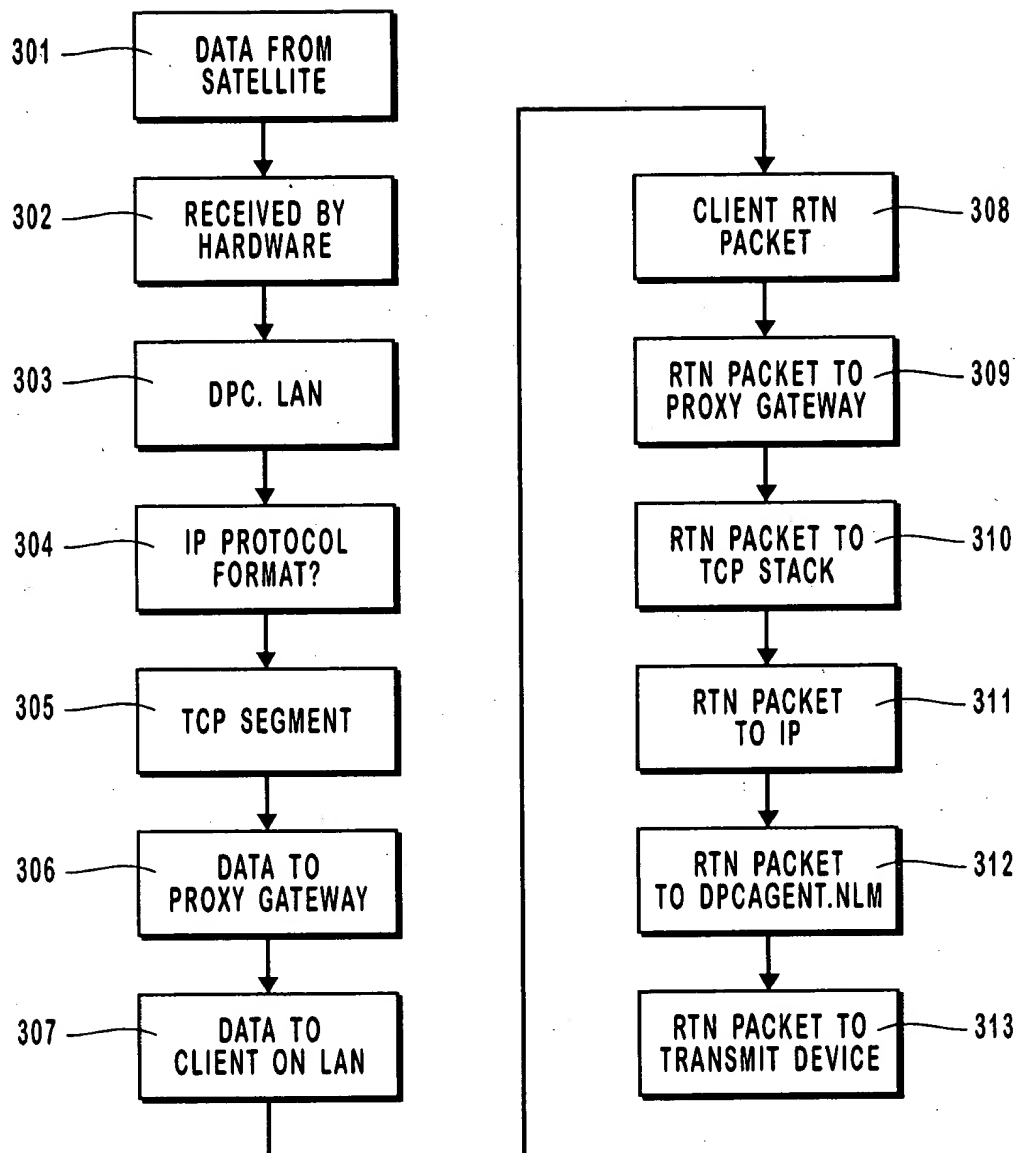


Fig. 3

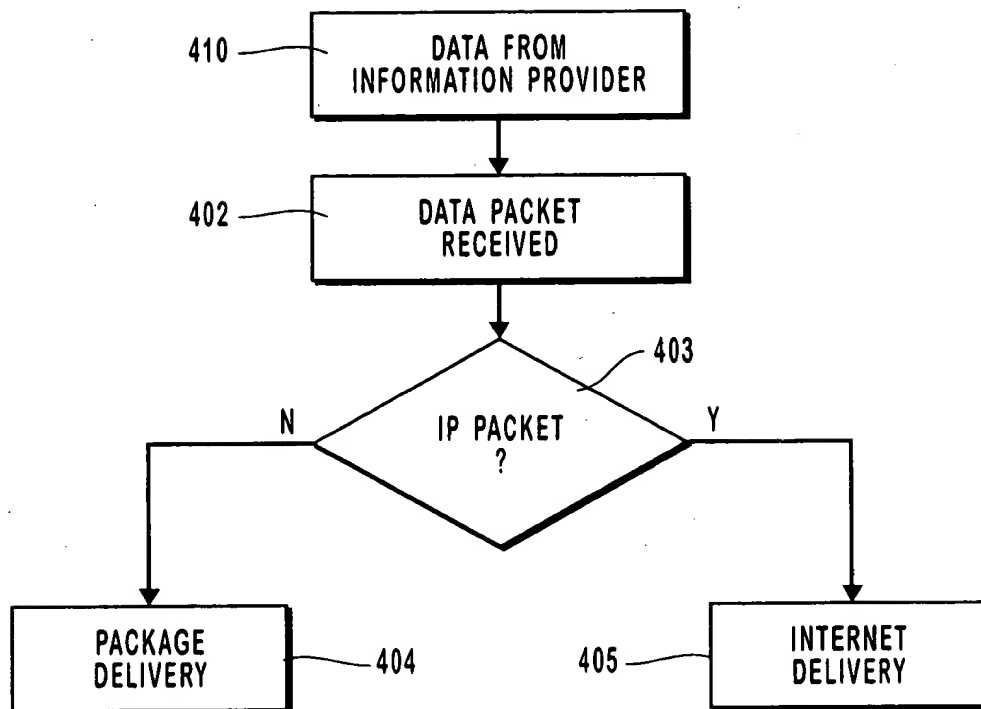


Fig. 4

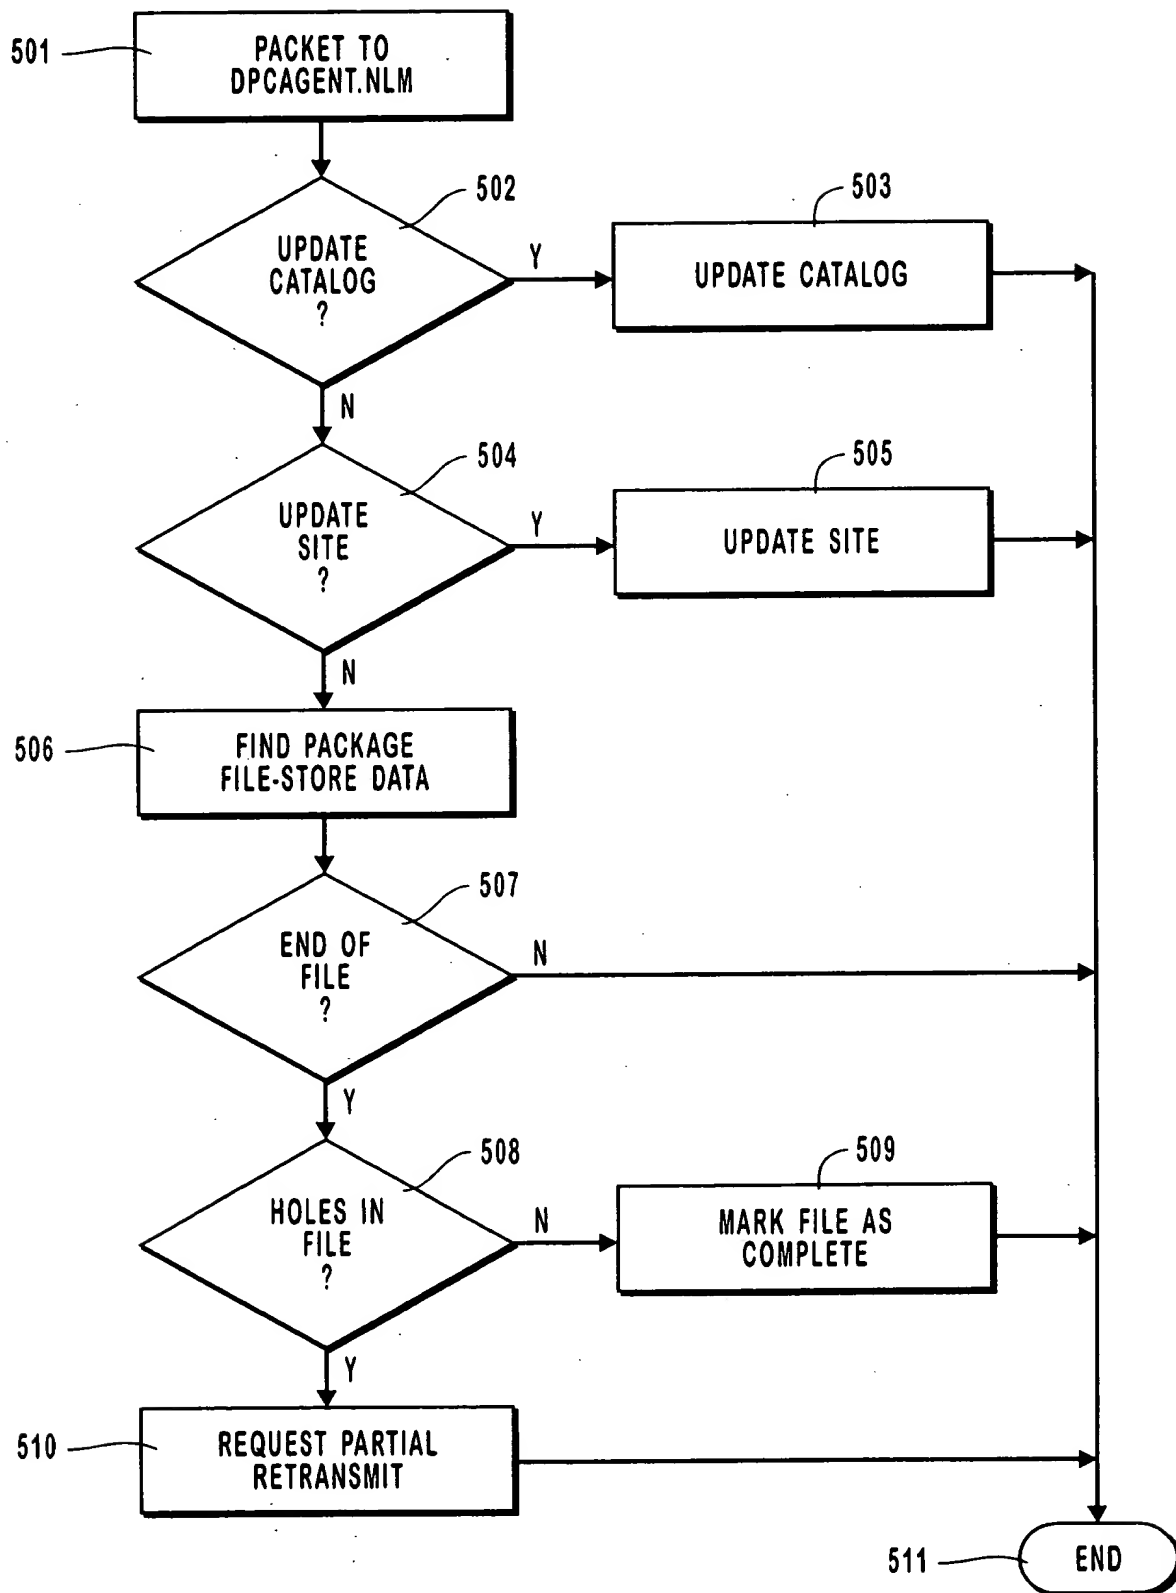


Fig. 5

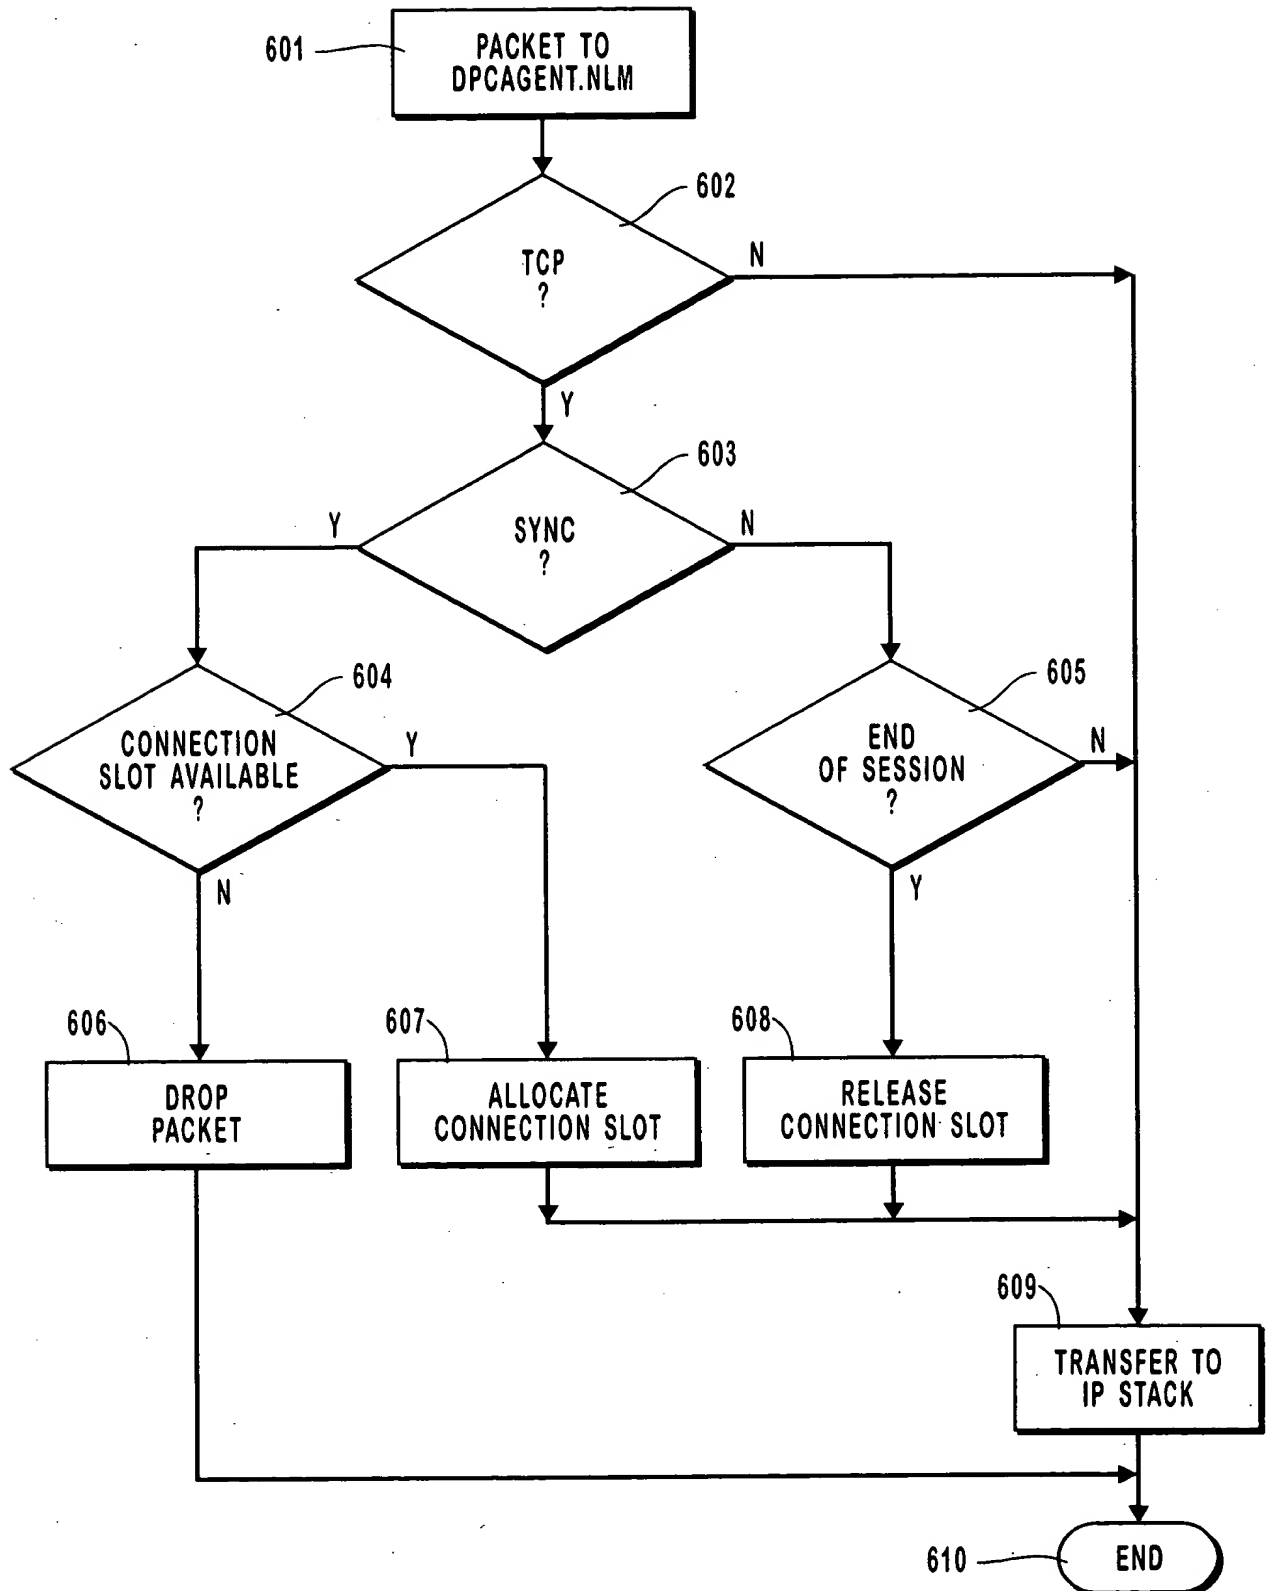


Fig. 6

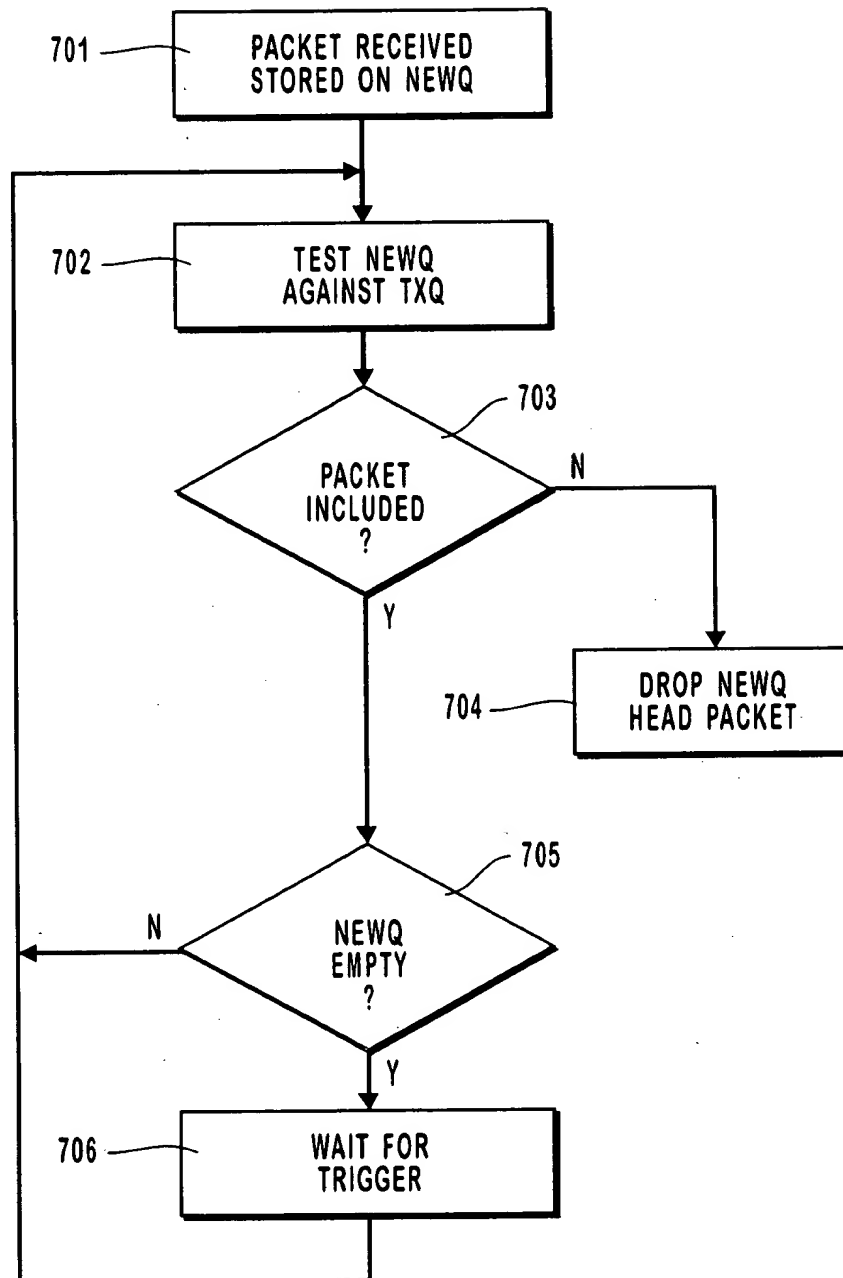


Fig. 7

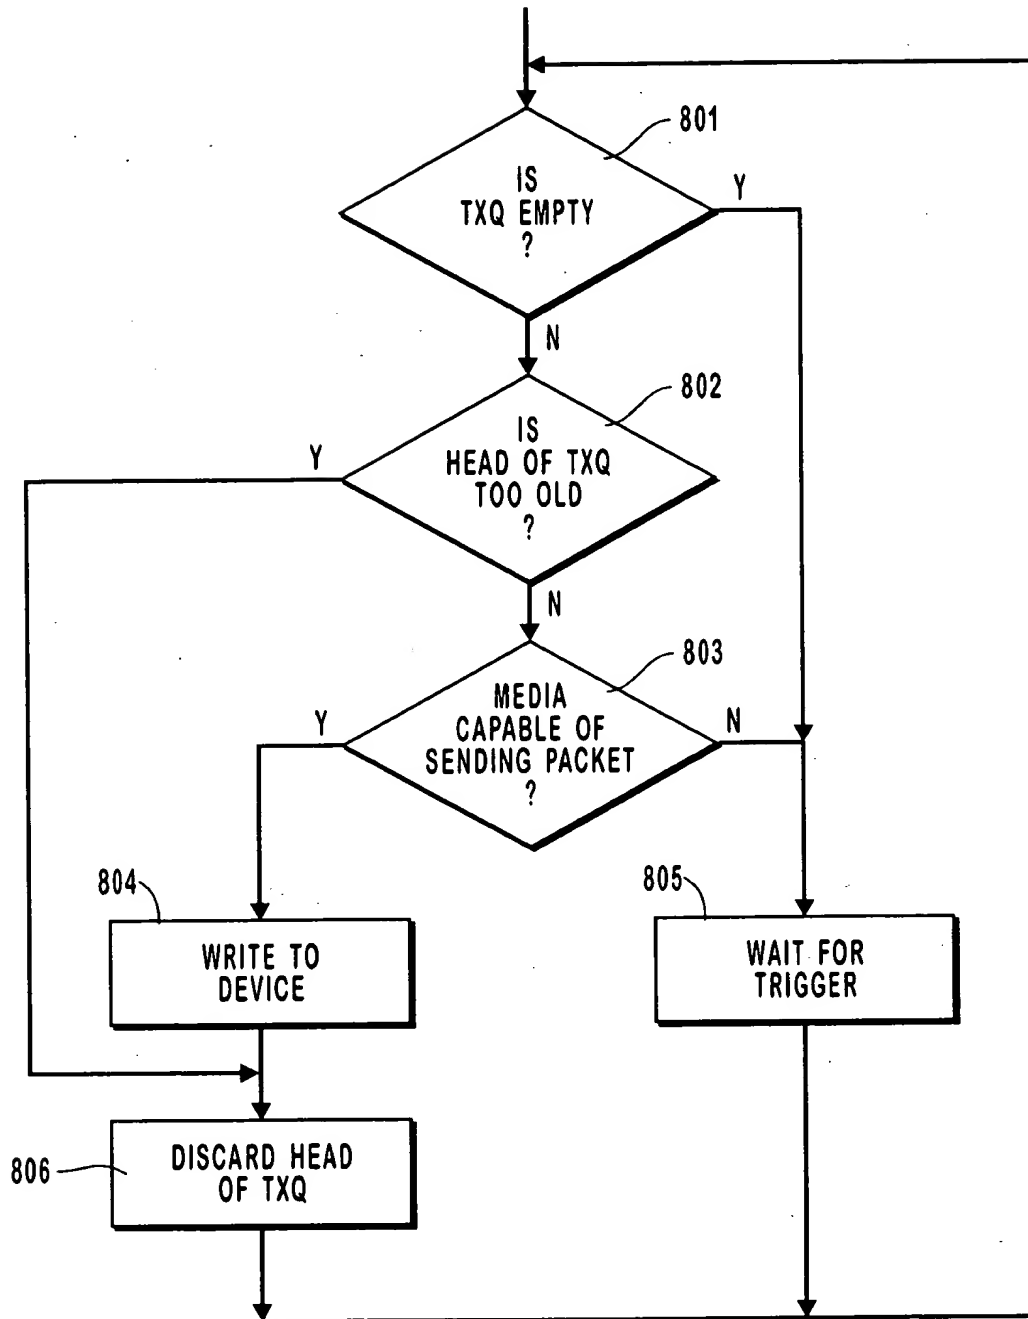


Fig. 8



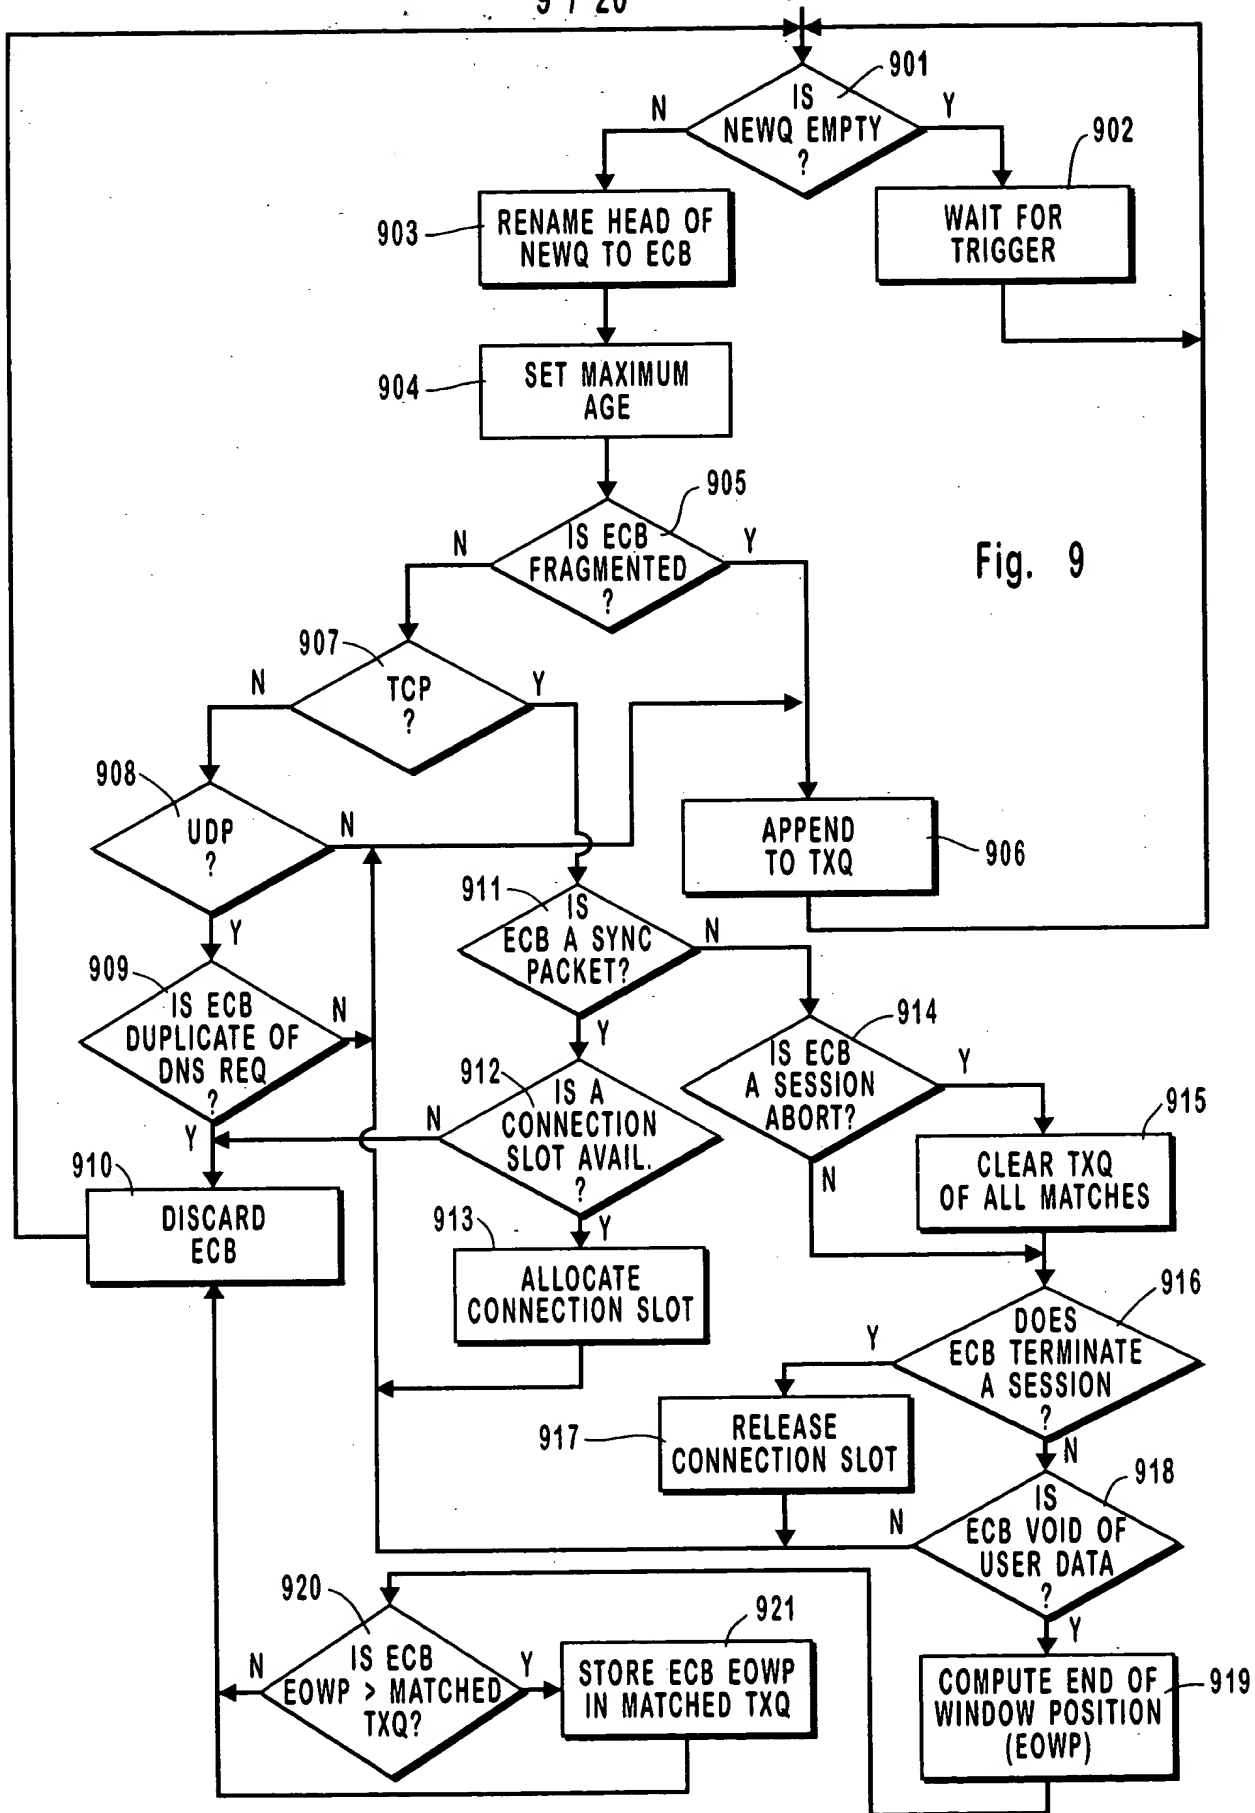


Fig. 9

100-000000-000000

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
CRAFTSMAN		

10 / 20

**DPC AGENT PROGRAM 1.50**

**DPCAGENT Options**

Package Delivery

Display MLID Stats

DPC Configuration

Dish Pointing

Adapter Information

Modem Control

Exit DPCAGENT

Modem Status: IDLE

Package Status: IDLE

Select an Option <Enter>

Tx ☐ Rx ☐ Cd ☐

Users 50 Keys ☐ Signal ☐

Fig. 10a-1

**DPC AGENT PROGRAM 1.50**

**Digital Package Delivery**

DIRECPC	AVI	Marilyn Avi
DIRECPC	Win3x	Sports Ticker 16 Bit App for Win 3.1
HELIUS	HELIUSDV	Helius 38MB File
HELIUS	HELIUSDV	Helius Costly File
HELIUS	HELIUSDV	Helius Test HIGH priority

**Status**    <TAB> Sorting    <Enter> Details    <Ins> Download    <DEL> Cancel

Modem Status: IDLE

Package Status: IDLE

Select an Option <Enter>

Tx ☐ Rx ☐ Cd ☐

Users 50 Keys ☐ Signal ☐

Fig. 10a-2

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

11 / 20

**DPC AGENT PROGRAM 1.50**

**DPCAGENT Options**

Package Delivery

Display MLID Stats

DPC Configuration

Dish Pointing

Adapter Information

Modem Control

Exit DPCAGENT

Modem Status: IDLE

Package Status: marilyn avi  52%

Select an Option <Enter>

Tx ☐ Rx ☐ Cd ☐

1755510/3374352

Users 50 Keys ☐ Signal ☐

Fig. 10b-1

**DPC AGENT PROGRAM 1.50**

**Digital Package Delivery**

DIRECPC	Win3x	Sports Ticker 16 Bit App for Win 3.1
HELIUS	HELIUSDV	Helius 38MB File
HELIUS	HELIUSDV	Helius Costly File
HELIUS	HELIUSDV	Helius Test HIGH priority
CONFIRM DIRECPC	AVI	Marilyn Avi

**Status**    <TAB> Sorting    <Enter> Details    <Ins> Download    <DEL> Cancel

Modem Status: IDLE

Package Status: IDLE

Select an Option <Enter>

Tx ☐ Rx ☐ Cd ☐

Users 50 Keys ☐ Signal ☐

Fig. 10b-2

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

12 / 20

DPC AGENT PROGRAM 1.50			
Digital Package Delivery			
DIRECPC	Win3x	Sports Ticker 16 Bit App for Win 3.1	
HELIUS	HELIUSDV	Helius 38MB File	
HELIUS	HELIUSDV	Helius Costly File	
HELIUS	HELIUSDV	Helius Test HIGH priority	
NEEDED DIRECPC	AVI	Marilyn Avi	

**Status**    **<TAB>** Sorting    **<Enter>** Details    **<Ins>** Download    **<DEL>** Cancel  
 Modem Status: Dialing    Tx ☐ Rx ☐ Cd ☐  
 Package Status: IDLE  
 Select an Option **<Enter>** ☐

Fig. 10c-1

DPC AGENT PROGRAM 1.50			
Digital Package Delivery			
DIRECPC	Win3x	Sports Ticker 16 Bit App for Win 3.1	
HELIUS	HELIUSDV	Helius 38MB File	
HELIUS	HELIUSDV	Helius Costly File	
HELIUS	HELIUSDV	Helius Test HIGH priority	
NEEDED DIRECPC	AVI	Marilyn Avi	

**Status**    **<TAB>** Sorting    **<Enter>** Details    **<Ins>** Download    **<DEL>** Cancel  
 Modem Status: Disconnecting from Package Delivery Tx ☐ Rx ☐ Cd ☐  
 Package Status: marilyn.avi ☐ 20%    688512/3374352  
 Select an Option **<Enter>**    Users 50    Keys ☐ Signal ☐

Fig. 10c-2

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

13 / 20

DPC AGENT PROGRAM 1.50	
DPC_1_EII [Dpc port=140 int=B frame=ETHERNET_II]	
Version 1.20	
Node Address: 80AE000001	
Protocols:	
ARP	
IP	
Generic statistics	
Total packets sent:	1
Total packets received:	0
No ECB available count:	0
Send packet too big count:	0
Reserved:	Not Supported
Receive packet overflow count:	0
Receive packet too big count:	0
Receive packet too small count:	Not Supported
Send packet miscellaneous errors:	0
Receive packet miscellaneous errors:	0
Modem Status: IDLE	Tx <input type="checkbox"/> Rx <input type="checkbox"/> Cd <input type="checkbox"/>
Package Status: IDLE	
Select an Option <Enter>	Users 50 Keys <input type="checkbox"/> Signal <input type="checkbox"/>

Fig. 10d-1

DPC AGENT PROGRAM 1.50	
DPC_1_EII [Dpc port=140 int=B frame=ETHERNET_II]	
Send abort from excessive deferral	0
Receive abort from bad frame alignment	0
Custom statistics	
Signal Quality	235
Rx Frequency	13,300
Largest Received IP Frame	0
Number of Receive IP Frames over 400	0
Ave size of Receive IP frames over 400	0
Mips Rx enable commands	0
Mips Rx disable commands	0
Mips frames accepted	6,962
Mips frames rejected from no filter match	1,489,475
Mips frames rejected from zero address	0
Mips frames rejected from adapter disabled	0
Mips frames rejected from low buffer pool	3,611,966
Modem Status: IDLE	Tx <input type="checkbox"/> Rx <input type="checkbox"/> Cd <input type="checkbox"/>
Package Status: IDLE	
Select an Option <Enter>	Users 50 Keys <input type="checkbox"/> Signal <input type="checkbox"/>

Fig. 10d-2

APPROVED	O.G. FIG	
BY	CLASS	SUBCLASS
DRAFTSMAN		

14 / 20

DPC AGENT PROGRAM 1.50

**DPC Configuration**

Modem Configuration
Package Delivery Configuration
Provider Configuration

Modem Status: IDLE Tx ☐ Rx ☐ Cd ☐  
Package Status: IDLE  
Select an Option <Enter> Users 50 Keys ☐ Signal ☐

Fig. 10e-1

DPC AGENT PROGRAM 1.50

**Modem Configuration Editor**

Packet Life(sec)	= 120
Call Setup(sec)	= 60
Aync Buffer Size	= 8192
Dial Prefix	= ATDT
Hangup Str	= ATH0
Disconnect str	= NO CARRIER
Escape Str	= +++
Connect str	= CONNECT
Init str	= AT&F1

Modem Status: IDLE Tx ☐ Rx ☐ Cd ☐  
Package Status: IDLE  
Select an Option <Enter> Users 50 Keys ☐ Signal ☐

Fig. 10e-2

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

15 / 20

DPC AGENT PROGRAM 1.50

Package Delivery Configuration Editor	
Package Phone	= 1-800-825-3954
Package Baud	= 9600
Package Inactivity(sec)	= 10
Max Database Entries	= 1024

Modem Status: IDLE Tx ☐ Rx ☐ Cd ☐  
Package Status: IDLE  
Select an Option <Enter> Users 50 Keys ☐ Signal ☐

Fig. 10f-1

DPC AGENT PROGRAM 1.50

Provider Configuration Editor	
Outbound Protocol = Modem - PPP	
Internet Phone	= 343-2720
Internet Baud	= 57600
Internet MTU	= 1500
Internet Inactivity(sec)	= 180
IP Address(ISP)	= 153.35.210.185
Hybrid gateway Address	= 206.71.99.5
Auto Login Enabled	= No
Modify Auto login Script	
Modify PPP Configuration	

Modem Status: IDLE Tx ☐ Rx ☐ Cd ☐  
Package Status: IDLE  
Select an Option <Enter> Users 50 Keys ☐ Signal ☐

Fig. 10f-2

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

16 / 20

DPC AGENT PROGRAM 1.50	
Login Script Editor	
Wait1:	<input type="text"/> Wait Timeout 1= 10
Send1:	
Wait2:	Wait Timeout 2= 5
Send2:	
Wait3:	Wait Timeout 3= 5
Send3:	
Wait4:	Wait Timeout 4= 5
Send4:	
Wait5:	Wait Timeout 5= 5
Send5:	
Wait6:	Wait Timeout 6= 5
Send6:	
Wait7:	Wait Timeout 7= 5
Send7:	
Wait8:	Wait Timeout 8= 5
Send8:	
Wait9:	Wait Timeout 9= 5
Send9:	
Modem Status: IDLE Tx <input type="checkbox"/> Rx <input type="checkbox"/> Cd <input type="checkbox"/> Package Status: IDLE Select an Option <Enter> Users 50 Keys <input type="checkbox"/> Signal <input type="checkbox"/>	

Fig. 10g-1

DPC AGENT PROGRAM 1.50	
Provider Configuration Editor	
Outbound Protocol = Modem - PPP	
PPP Configuration Editor	
Authentication User Name: Authentication Password :  Maximum Receive Unit : <input type="text" value="1400"/> Asynch. Control Char Map: 0x0	
Modify Auto Login Script Modify PPP Configuration	
Modem Status: IDLE Tx <input type="checkbox"/> Rx <input type="checkbox"/> Cd <input type="checkbox"/> Package Status: IDLE Select an Option <Enter> Users 50 Keys <input type="checkbox"/> Signal <input type="checkbox"/>	

Fig. 10g-2



APPROVED	O.G. FIG.
BY	CLASS SUBCLASS
DRAFTSMAN	

17 / 20

**DPC AGENT PROGRAM 1.50**

**Provider Configuration Editor**

<p>Internet Phone</p> <p>Internet Baud</p> <p>Internet MTU</p> <p>Internet Inactivity(sec)</p> <p>IP Address(ISP)</p> <p>Hybrid gateway Address</p> <p>Auto Login Enabled</p>	<p>Outbound Protocol = <span style="border: 1px solid black; padding: 2px;">Modem - PPP</span></p> <div style="border: 1px solid black; padding: 5px;"> <p>Outbound Protocol</p> <p>Modem - SLIP</p> <p>Modem - PPP</p> <p>LAN/WAN</p> </div> <p>= No</p> <p>Modify Auto login Script</p> <p>Modify PPP Configuration</p>
---	---

Modem Status: IDLE Tx ☐ Rx ☐ Cd ☐

Package Status: IDLE

Select an Option <Enter> Users 50 Keys ☐ Signal ☐

Fig. 10h-1

**DPC AGENT PROGRAM 1.50**

**Provider Configuration Editor**

Outbound Protocol = LAN/WAN

**Network Route Configuration Editor**

<p>Interface:</p> <p>Router Mac Address:</p> <p>Auto Login Enabled</p>	<p><span style="border: 1px solid black; padding: 2px;">2</span></p> <p>00-00-0c-4a-55-f4</p> <p>= No</p> <p>Modify Auto Login Script</p> <p>Modify Network Configuration</p>
--	---

Modem Status: IDLE Tx ☐ Rx ☐ Cd ☐

Package Status: IDLE

Select an Option <Enter> Users 50 Keys ☐ Signal ☐

Fig. 10h-2

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

18 / 20

DPC AGENT PROGRAM 1.50

Dish Pointing

Antenna Pointing Calculations

Signal Strength Meter

Modem Status: IDLE

Package Status: IDLE

Select an Option <Enter>

Tx ☐ Rx ☐ Cd ☐

Users 50 Keys ☐ Signal ☐

Fig. 10i-1

DPC AGENT PROGRAM 1.50

Antenna Pointing Calculations

Country = USA	Region = Utah
City = Orem	Service = Hughes
	Satellite = Galaxy 4
Satellite Longitude = 99	Hemisphere = West
Satellite Polarization = Horz	Frequency = 1330
Ground Longitude degrees = 111	minutes = 42 Hemisphere=West
Ground Latitude degrees = 40	minutes = 19 Hemisphere=North
COMPUTE NOW	
Elevation = 41.608868	
True Azimuth 160.800003	
Magnetic Azimuth 147.300003	
Polarization -14.500000	

Modem Status: IDLE

Package Status: IDLE

Select an Option <Enter>

Tx ☐ Rx ☐ Cd ☐

Users 50 Keys ☐ Signal ☐

Fig. 10i-2

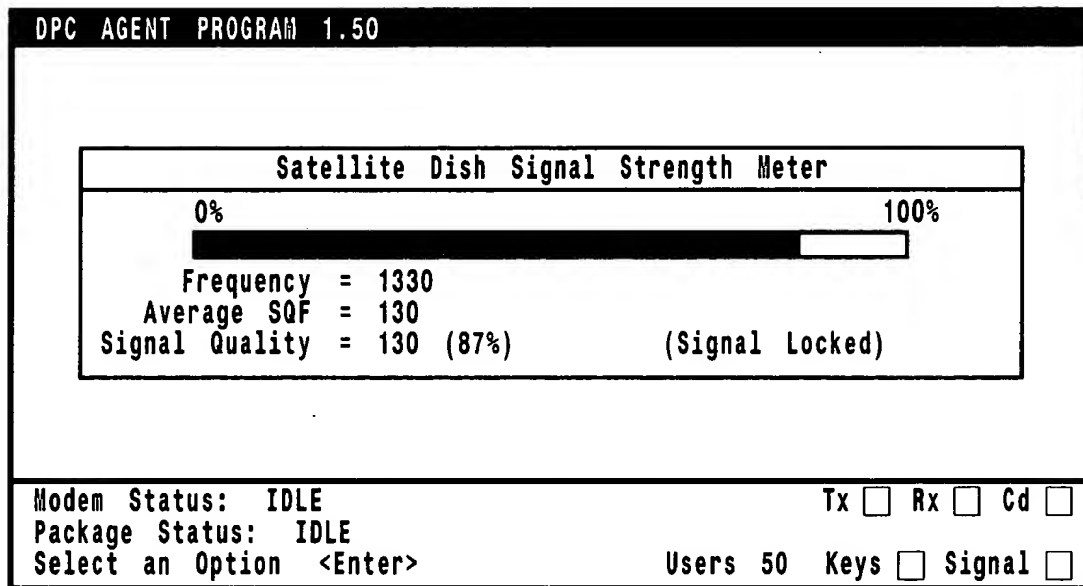


Fig. 10j-1

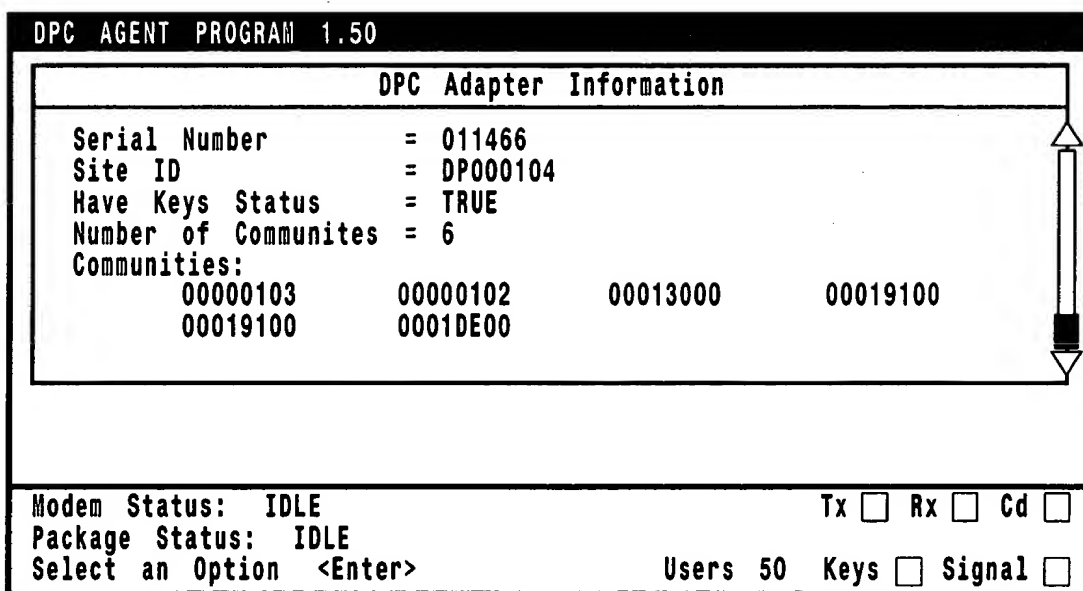


Fig. 10j-2

